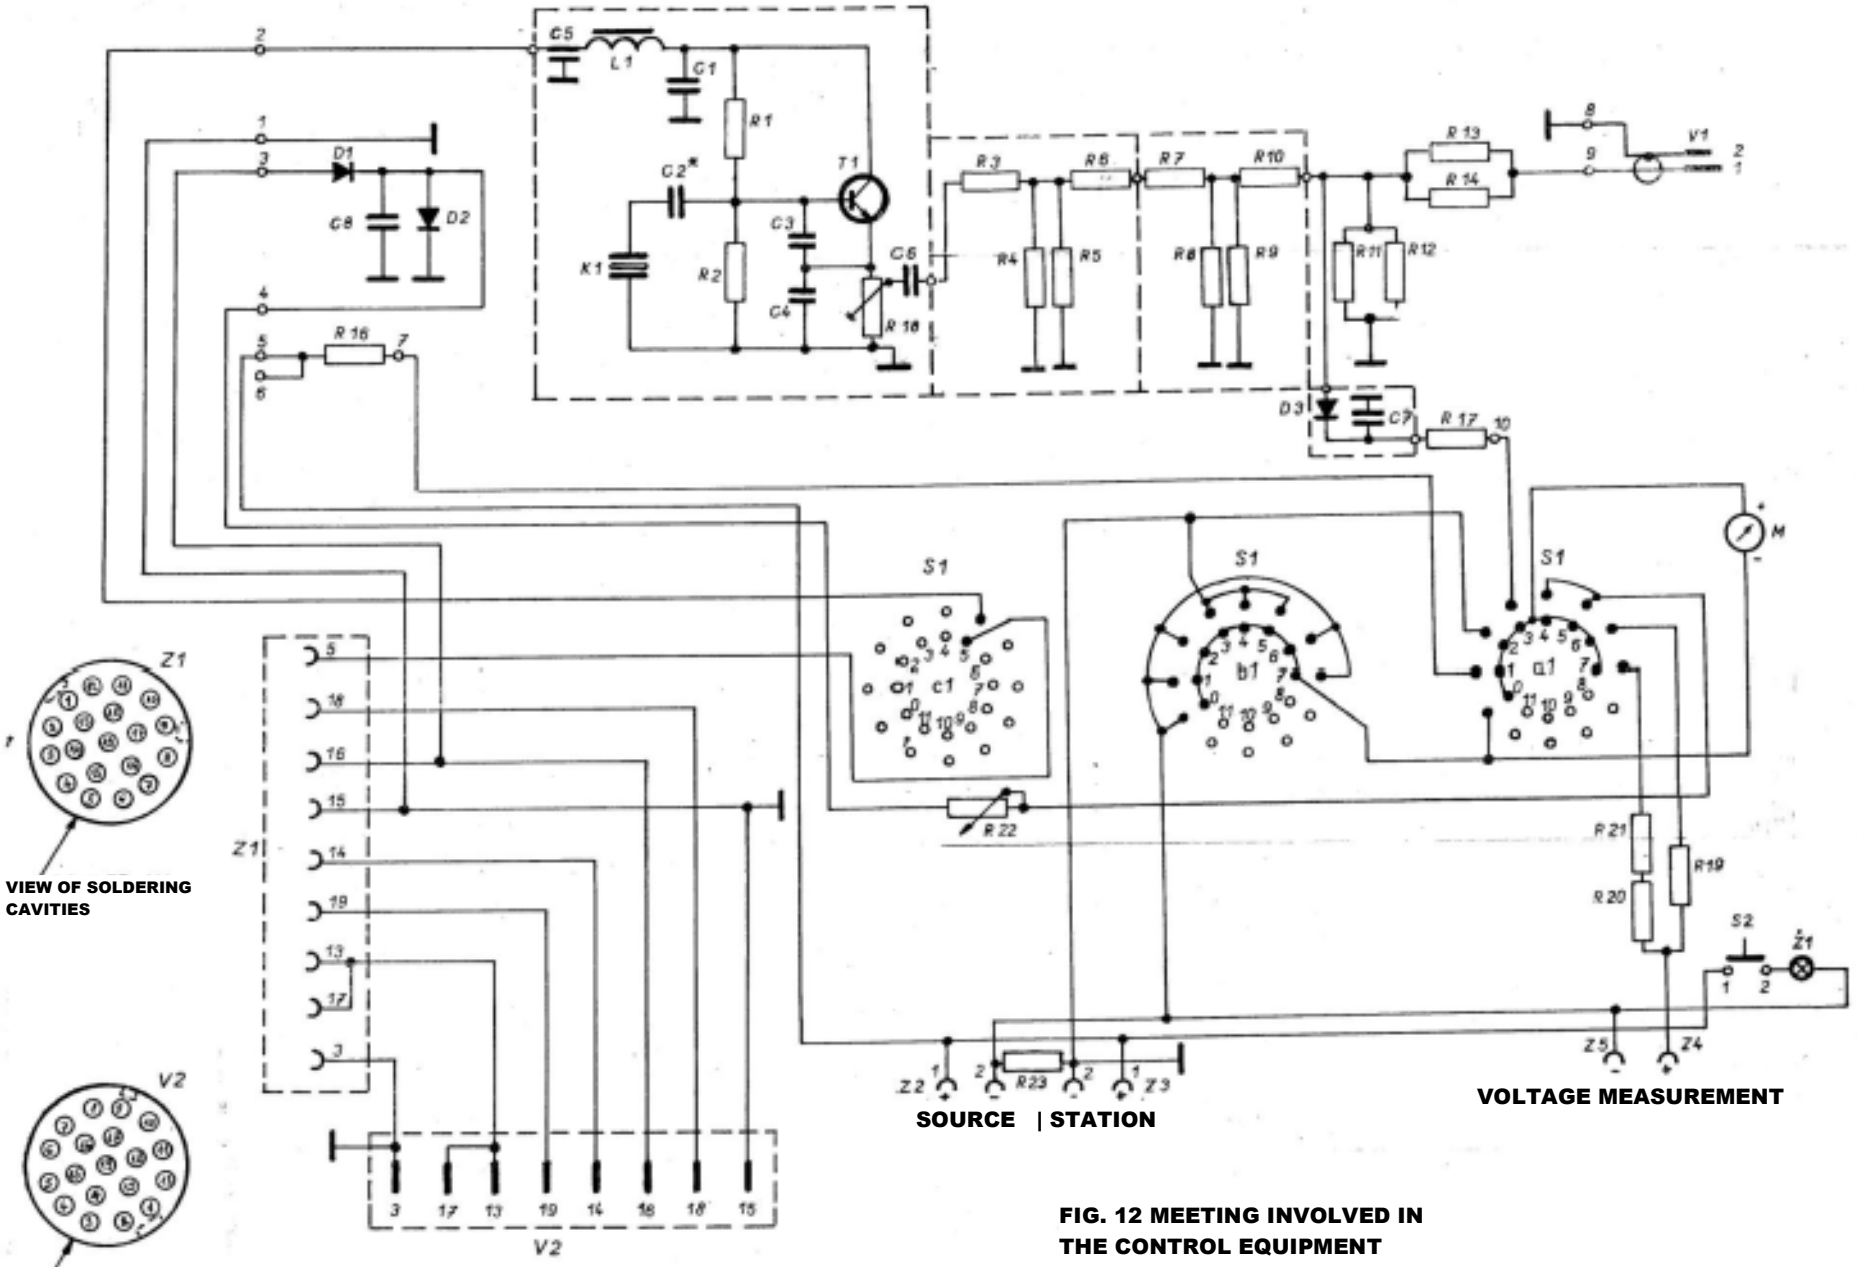
VIEW OF SOLDERING CAVITIES
VIEW OF SOLDERING PINS
SOURCE | STATION
VOLTAGE MEASUREMENT
* KONDENZÁTOR C2 LZE PODLE POTŘEBY NAHRADIT SPOJKOU

FIG. 12 MEETING INVOLVED IN THE CONTROL EQUIPMENT

("THE C2 CAPACITOR CAN BE REPLACED BY A CLUTCH (CONNECTOR, CONJUNTION) ACCORDING TO THE...")

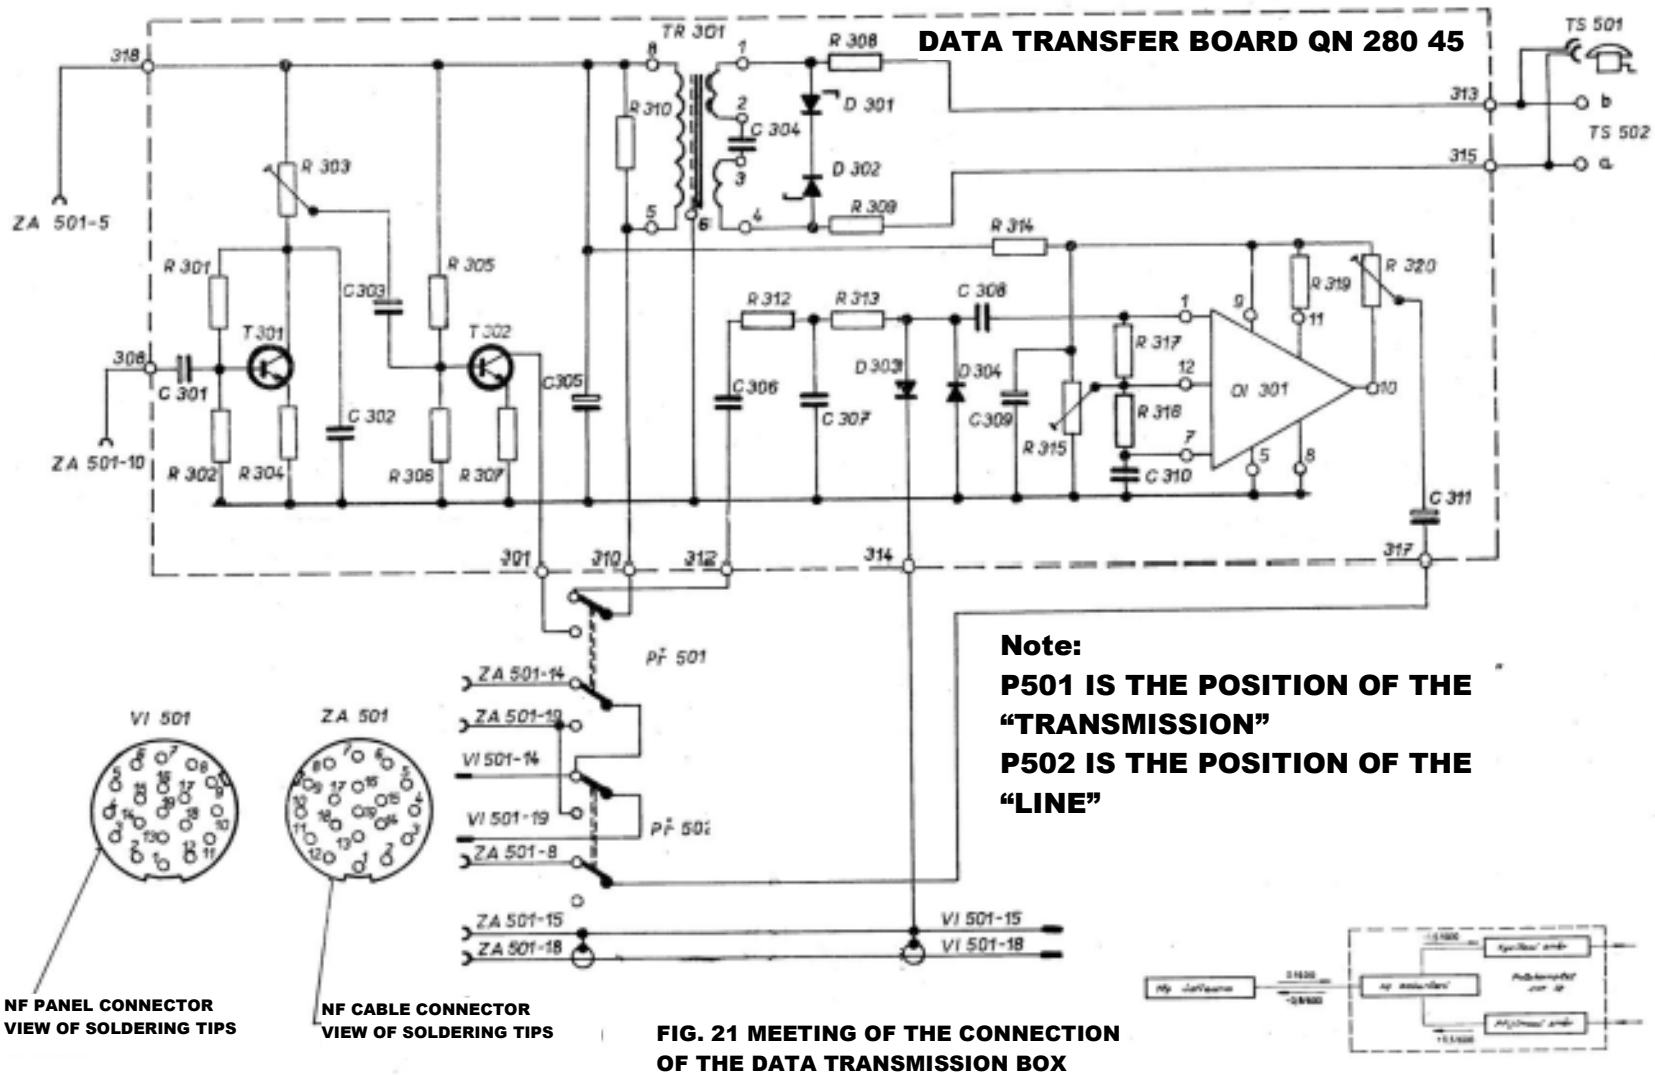

Note:
P501 IS THE POSITION OF THE "TRANSMISSION"
P502 IS THE POSITION OF THE "LINE"

FIG. 21 MEETING OF THE CONNECTION OF THE DATA TRANSMISSION BOX

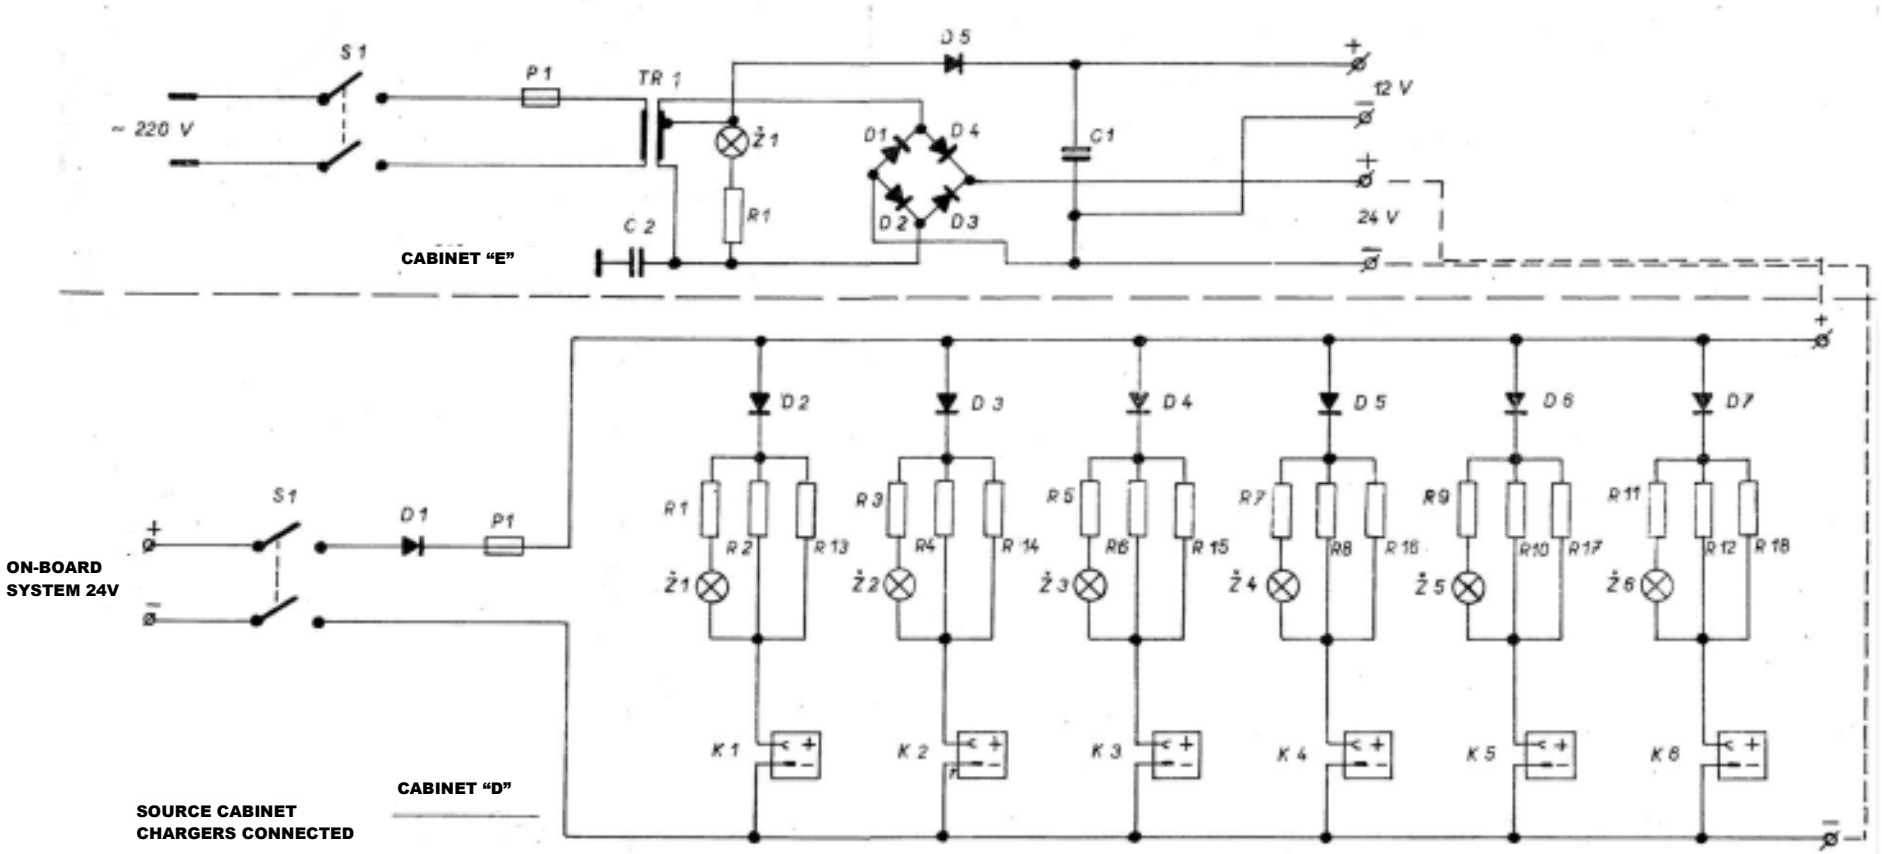
S1
P1
TR 1
~ 220 V
Ż1
R1
C 2
D5
D1
D4
D2
D3
C1
12 V
24 V
CABINET "E"
D2
D3
D4
D5
D6
D7
R1
R2
R13
R3
R4
R14
R5
R6
R15
R7
R8
R16
R9
R10
R17
R11
R12
R18
Ż1
Ż2
Ż3
Ż4
Ż5
Ż6
K1
K2
K3
K4
K5
K6
S1
D1
P1
ON-BOARD
SYSTEM 24V
CABINET "D"
SOURCE CABINET
CHARGERS CONNECTED